

ASIL

Elettroiduttori tubolari
Tubular Gearmotors

elsamec 
gears for comfort





ASIL45/10


cod. 70450101



Ø 45

Elettroiduttore Tubolare
ASIL 10Nm cavo 2m
17rpm (230V) adattatore
45mm senza manovra

Tubular Gearmotor ASIL
10Nm 2m cable 17rpm
(230V) 45mm adapter no
override




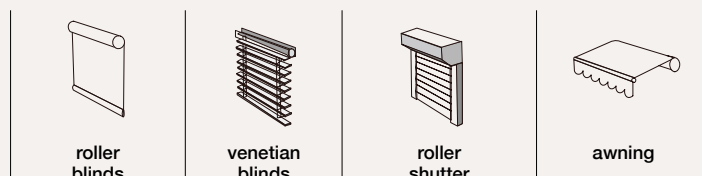


mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
10	17	230	50	162	0.71	25	IP44	≥4	2.1

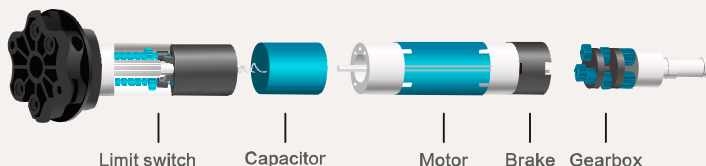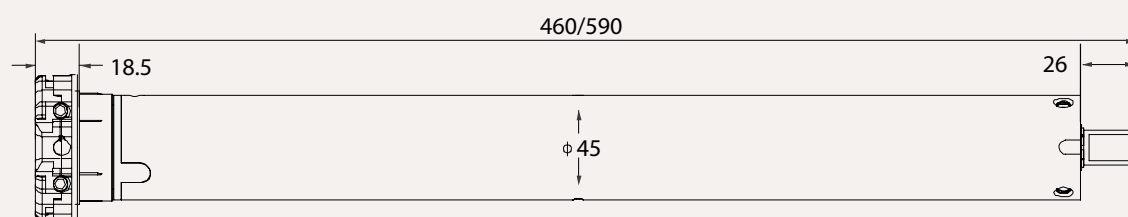

ASIL45/20


cod. 70450201



Ø 45

Tubular Gearmotor ASIL
20Nm 2m cable 17rpm
(230V) 45mm adapter no
override

Elettroiduttore Tubolare
ASIL 20Nm cavo 2m
17rpm (230V) adattatore
45mm senza manovra




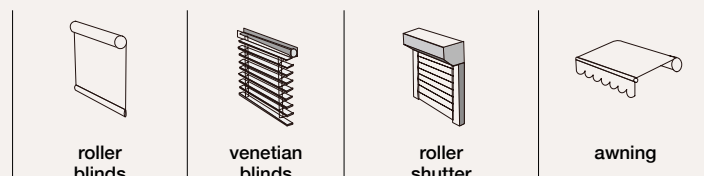


mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
20	17	230	50	178	0.78	25	IP44	≥4	2.3

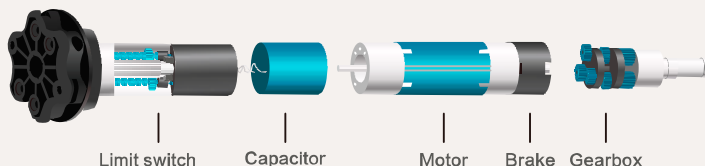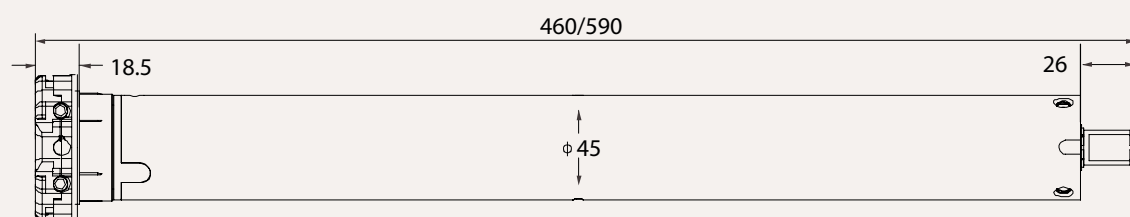

ASIL45/30


cod. 70450301



Ø 45

Tubular Gearmotor ASIL
30Nm 2m cable 15rpm
(230V) 45mm adapter no
override

Elettroiduttore Tubolare
ASIL 30Nm cavo 2m
15rpm (230V) adattatore
45mm senza manovra



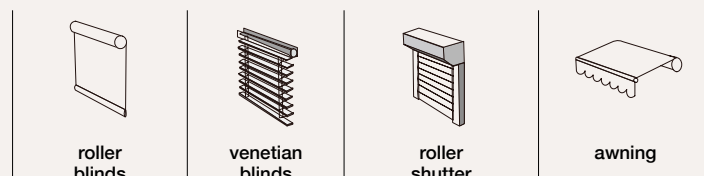


mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
30	15	230	50	235	1.03	25	IP44	≥4	2.8

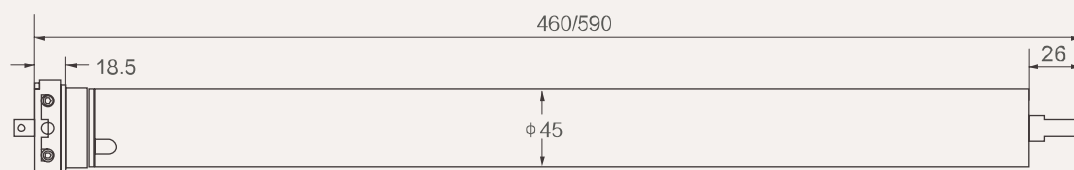

ASIL45/40


cod. 70450401



Ø 45

Tubular Gearmotor ASIL
40Nm 2m cable 12rpm
(230V) 45mm adapter no
override

Elettroiduttore Tubolare
ASIL 40Nm cavo 2m
12rpm (230V) adattatore
45mm senza manovra



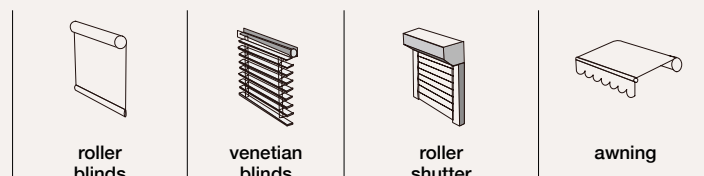


 mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
40	12	230	50	275	1.20	25	IP44	≥4	3.0

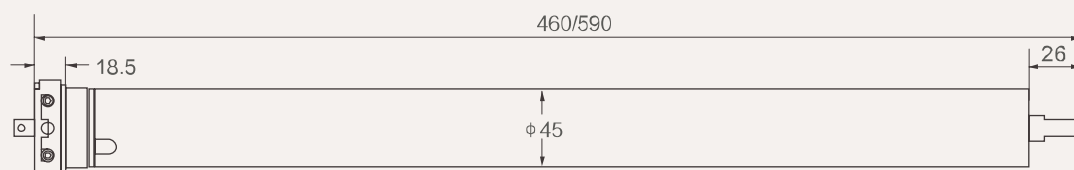


ASIL45/50

cod. 70450501



Tubular Gearmotor ASIL
50Nm 2m cable 12rpm
(230V) 45mm adapter no
override

Elettroiduttore Tubolare
ASIL 50Nm cavo 2m
12rpm (230V) adattatore
45mm senza manovra

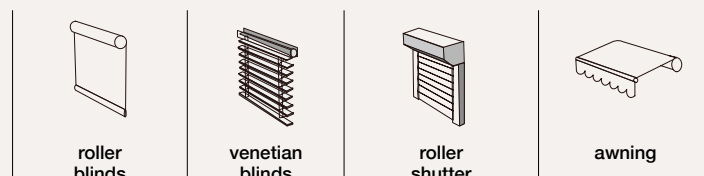

Ø 45






mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
50	12	230	50	282	1.23	25	IP44	≥4	3.2

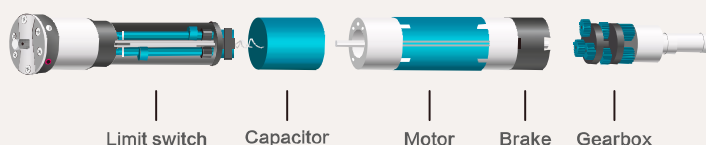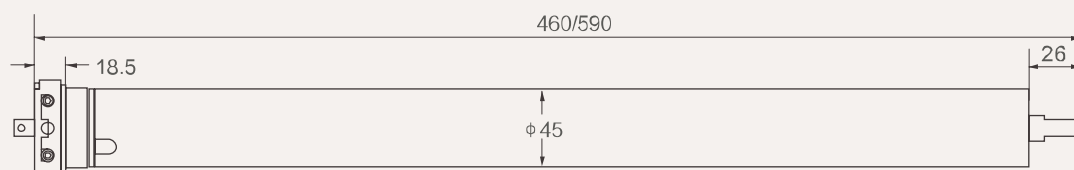



ASIL45 MR/10

cod. 704501MR



Tubular Gearmotor ASIL
10Nm 2m cable 17rpm
(230V) 45mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 10Nm cavo 2m
17Wrpm (230V) adattatore
45mm con manovra



remote control
included

Ø 45






electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
10	17	230	50	162	0.71	IP44	≥4	2.6

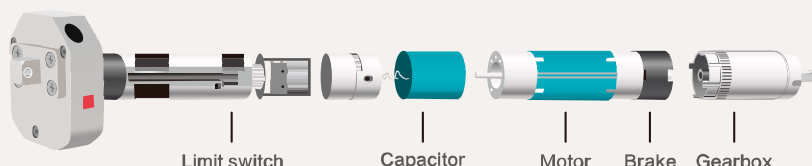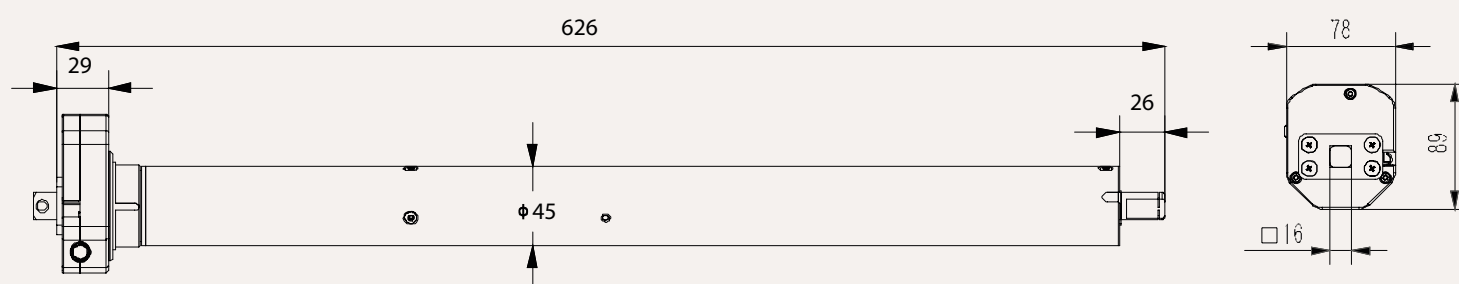



ASIL45 MR/20

cod. 704502MR



Tubular Gearmotor ASIL
20Nm 2m cable 17rpm
(230V) 45mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 20Nm cavo 2m
17rpm (230V) adattatore
45mm con manovra



remote control
included

Ø 45






electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
20	17	230	50	178	0.78	IP44	≥4	2.6

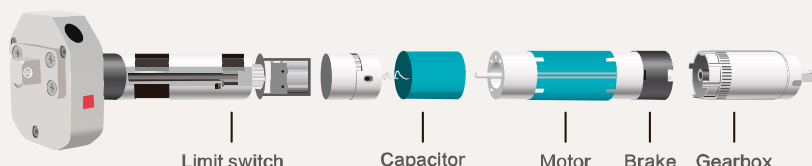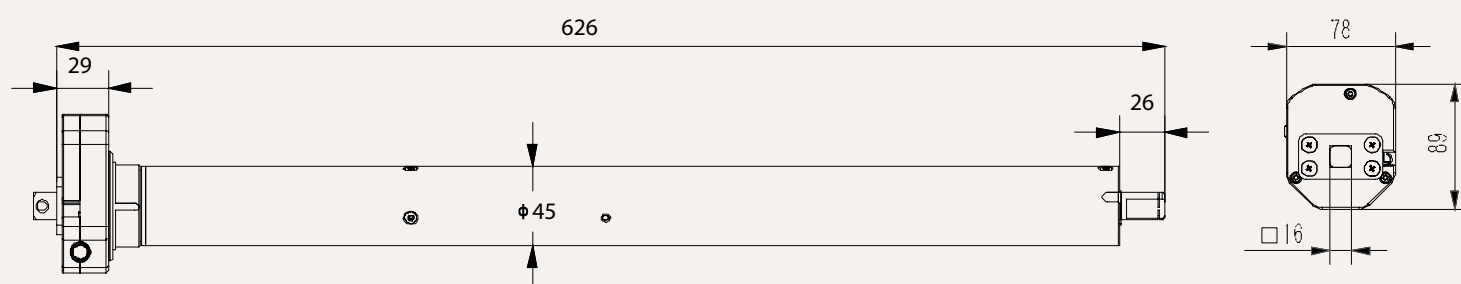


ASIL45 MR/30

cod. 704503MR




Tubular Gearmotor ASIL
30Nm 2m cable 15rpm
(230V) 45mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 30Nm cavo 2m
15rpm (230V) adattatore
45mm con manovra



roller
blinds



roller
shutter



awning



remote control
included

Ø 45






electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
30	15	230	50	235	1.03	IP44	≥4	3.2

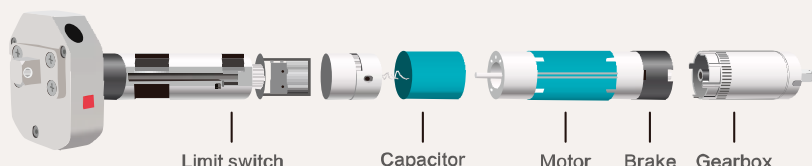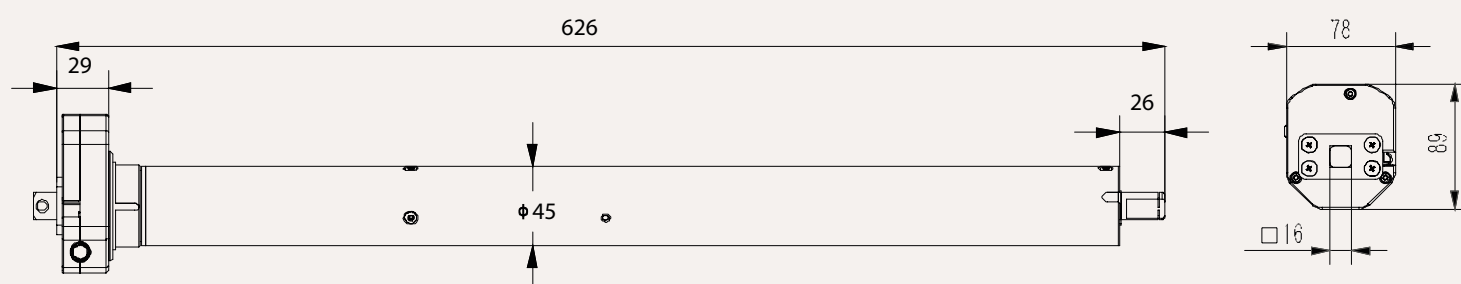


ASIL45 MR/40

cod. 704504MR



Tubular Gearmotor ASIL
40Nm 2m cable 12rpm
(230V) 45mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 40Nm cavo 2m
12rpm (230V) adattatore
45mm con manovra



remote control
included

Ø 45






electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
40	12	230	50	275	1.20	IP44	≥4	3.2

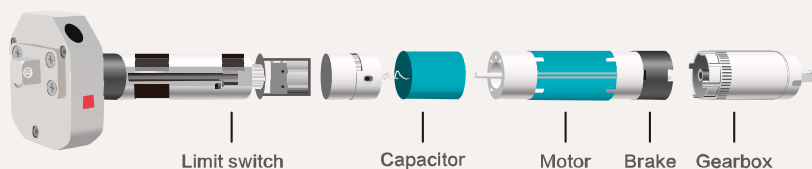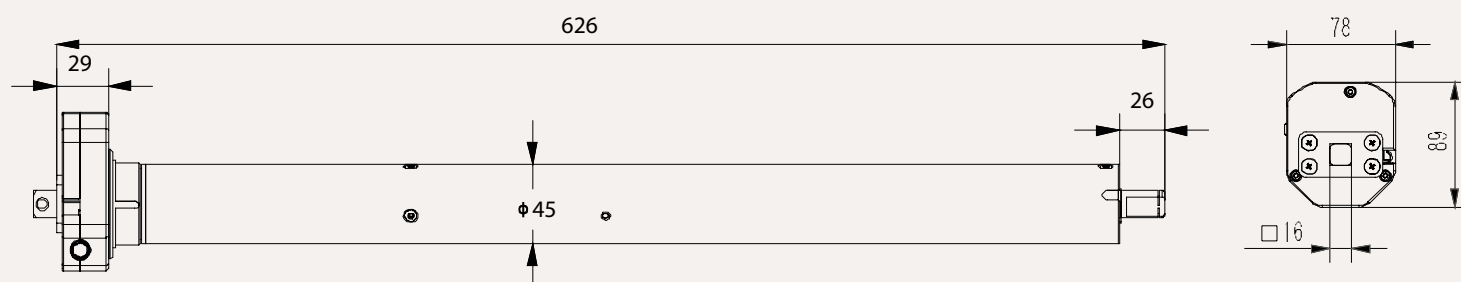


ASIL45 MR/50

cod. 704505MR



Tubular Gearmotor ASIL
50Nm 2m cable 12rpm
(230V) 45mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 50Nm cavo 2m
12rpm (230V) adattatore
45mm con manovra



remote control
included

Ø 45






electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
50	12	230	50	282	1.23	IP44	≥4	3.2

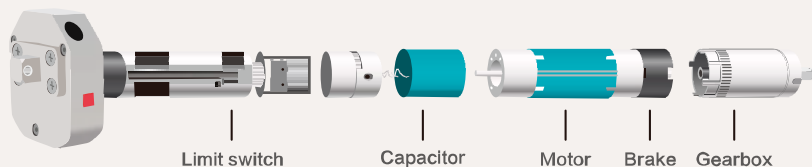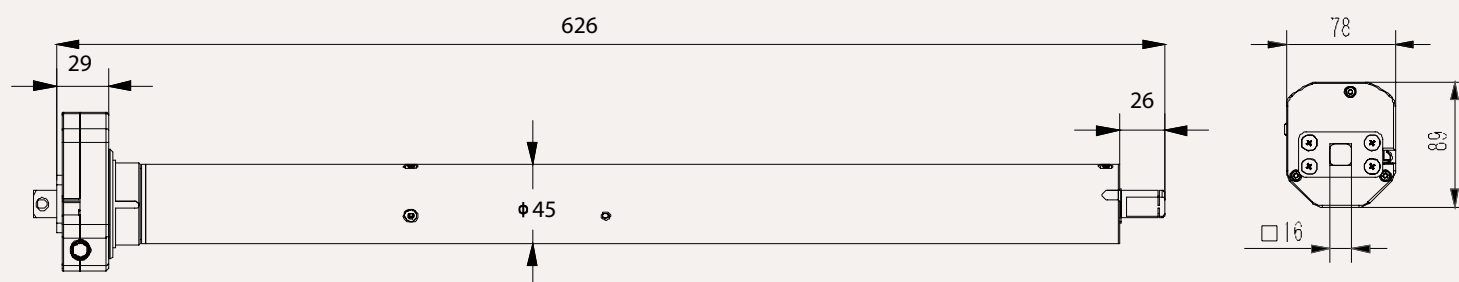

ASIL59/80


cod. 70590800



Ø 59

Tubular Gearmotor ASIL
80Nm 2m cable 12rpm
(230V) 59mm adapter no
override

Elettroiduttore Tubolare
ASIL 80Nm cavo 2m
12rpm (230V) adattatore
59mm senza manovra






mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
80	12	230	50	370	1.80	26	IP44	≥ 4	4.2

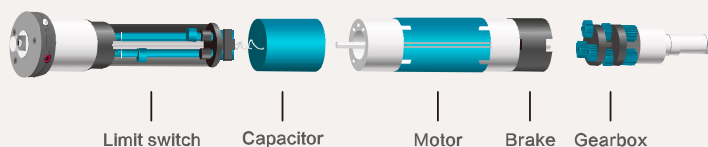


ASIL59/100

cod. 70591000



Tubular Gearmotor ASIL
100Nm 2m cable 12rpm
(230V) 59mm adapter no
override

Elettroiduttore Tubolare
ASIL 100Nm cavo 2m
12rpm (230V) adattatore
59mm senza manovra



Ø 59






mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
100	12	230	50	411	1.92	26	IP44	≥ 4	4.6

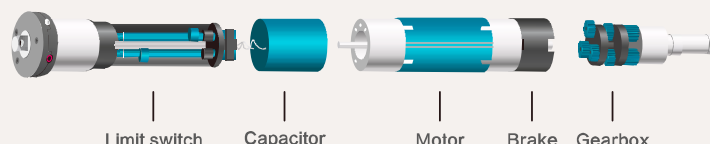

ASIL59/120


cod. 70591200



Ø 59

Tubular Gearmotor ASIL
120Nm 2m cable 12rpm
(230V) 59mm adapter no
override

Elettroiduttore Tubolare
ASIL 120Nm cavo 2m
12rpm (230V) adattatore
59mm senza manovra






mechanic limit + low noise



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
120	12	230	50	450	2.00	26	IP44	≥ 4	5.0

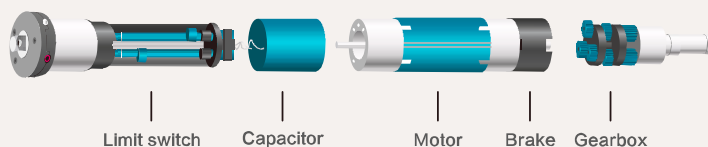

ASIL59 MR/80



cod. 705908MR



Ø 59

Tubular Gearmotor ASIL
80Nm 2m cable 12rpm
(230V) 59mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 80Nm cavo 2m
12rpm (230V) adattatore
59mm con manovra



remote control
included







electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
80	12	230	50	370	1.80	40	IP44	≥ 4	6.0

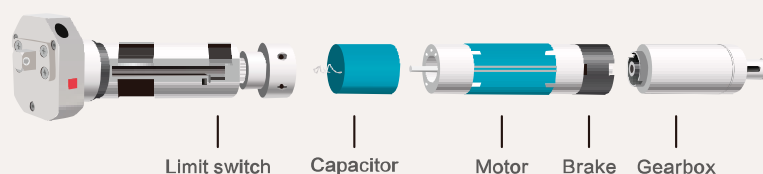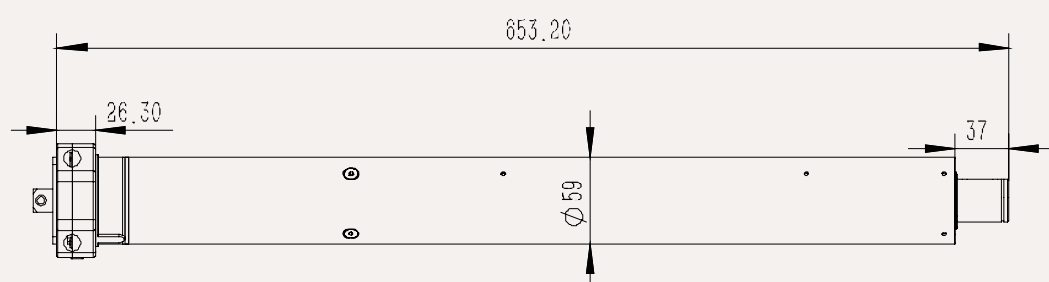

ASIL59 MR/100



cod. 705910MR



Ø 59

Tubular Gearmotor ASIL
100Nm 2m cable 12rpm
(230V) 59mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 100Nm cavo 2m
12rpm (230V) adattatore
59mm con manovra



remote control
included







electronic limit + manual override



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
100	12	230	50	411	1.92	40	IP44	≥ 4	6.6

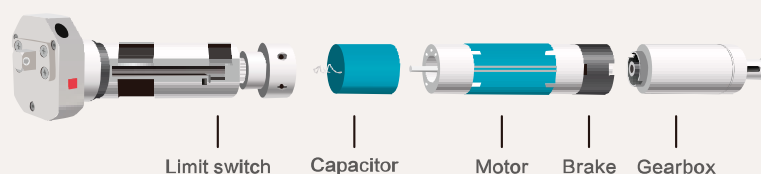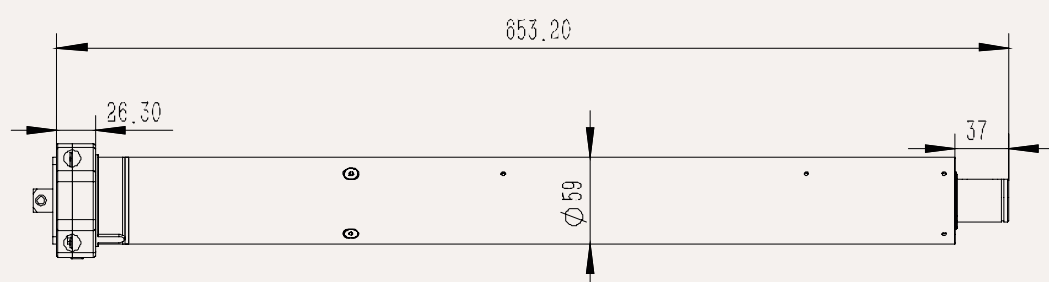

ASIL59 MR/120



cod. 705912MR



Ø 59

Tubular Gearmotor ASIL
120Nm 2m cable 12rpm
(230V) 59mm adapter
with manual override

Elettroiduttore Tubolare
ASIL 120Nm cavo 2m
12rpm (230V) adattatore
59mm con manovra



remote control
included







electronic limit + manual override




#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
120	12	230	50	450	2.00	40	IP44	≥ 4	6.8

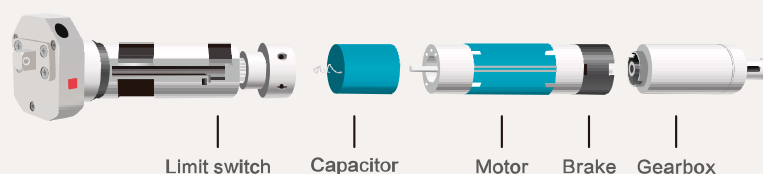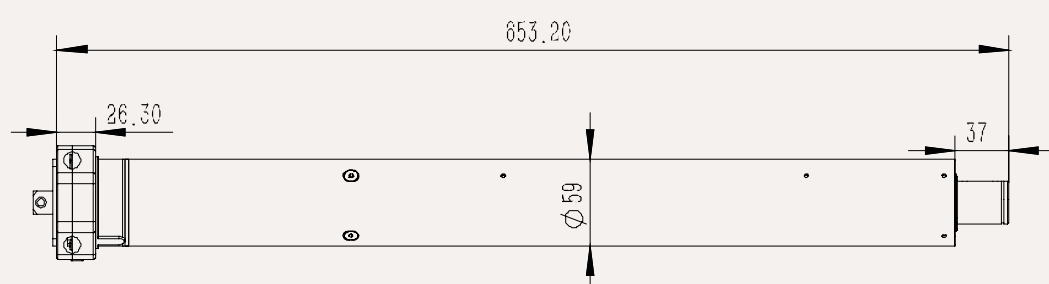

ASIL 92/350


cod. 709235M0

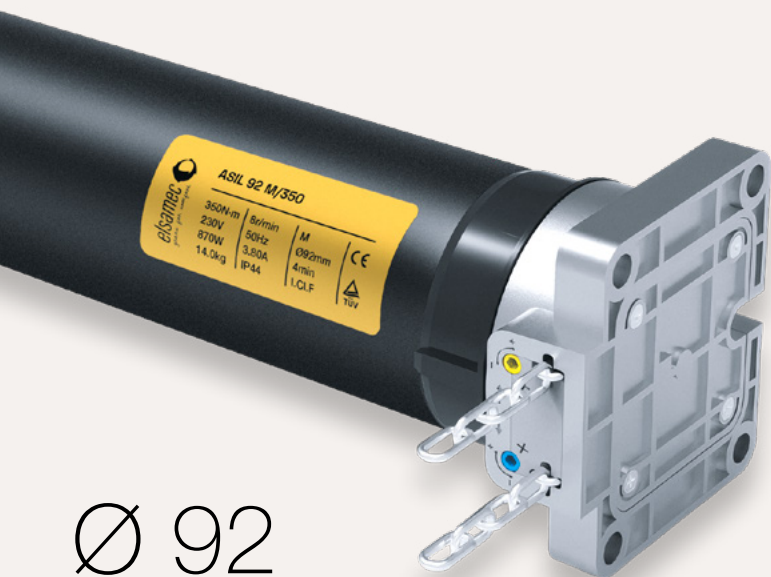

Ø 92

Tubular Gearmotor ASIL
350Nm 2m cable 8rpm
(230V) 92mm adapter
with override

Elettroiduttore Tubolare
ASIL 350Nm cavo 2m
8rpm (230V) adattatore
92mm con manovra



roller
door







mechanic limit + manual




#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
350	8	230	50	870	3.80	20	IP44	≥ 4	14.0

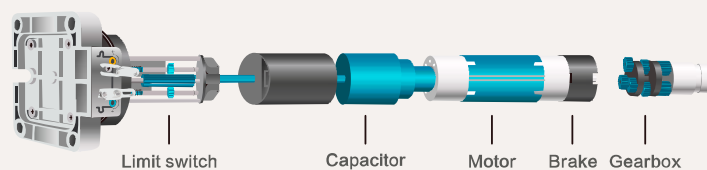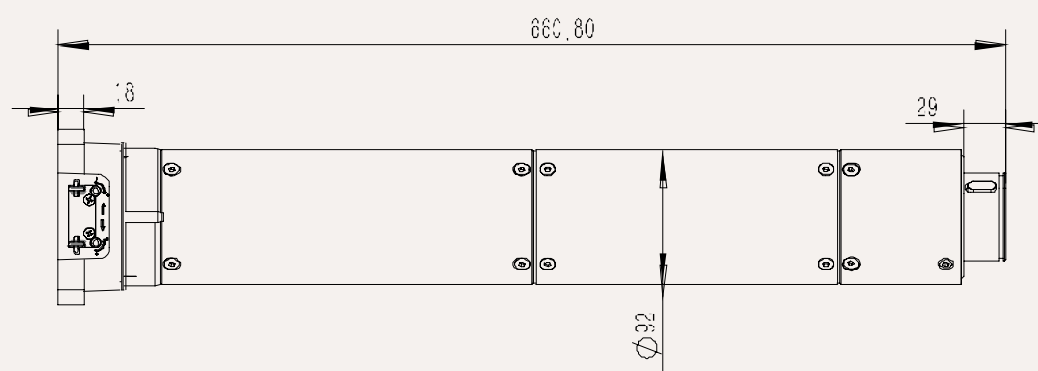

ASIL 92/450


cod. 709245M0

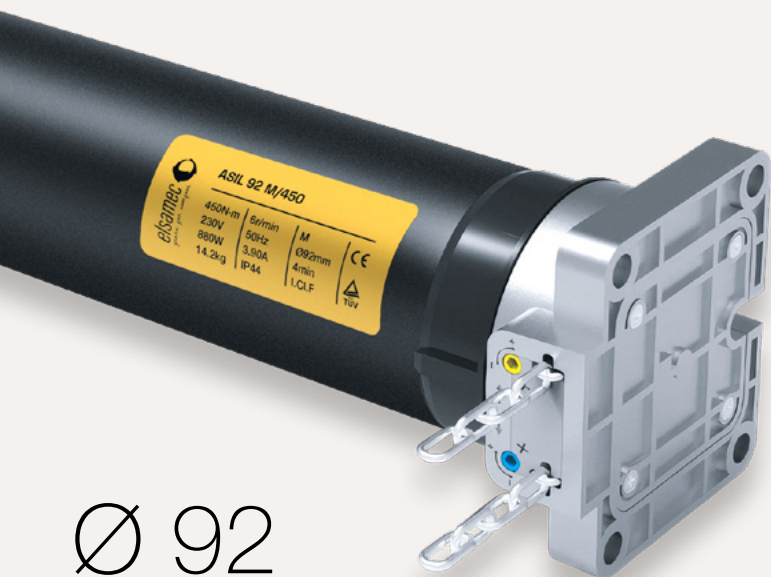

Ø 92

Tubular Gearmotor ASIL
450Nm 2m cable 6rpm
(230V) 92mm adapter with
override Elettroiduttore

Tubolare ASIL 450Nm
cavo 2m 6rpm (230V)
adattatore 92mm con
manovra



roller
door







mechanic limit + manual




#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
450	6	230	50	880	3.90	20	IP44	≥ 4	14.2

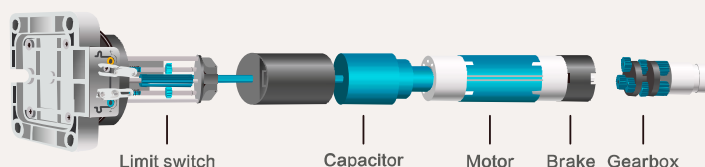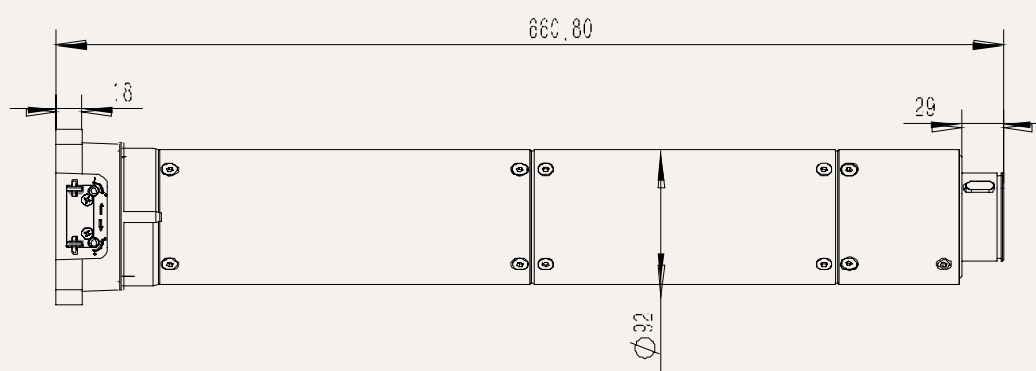

ASIL 92/550


cod. 709255M0

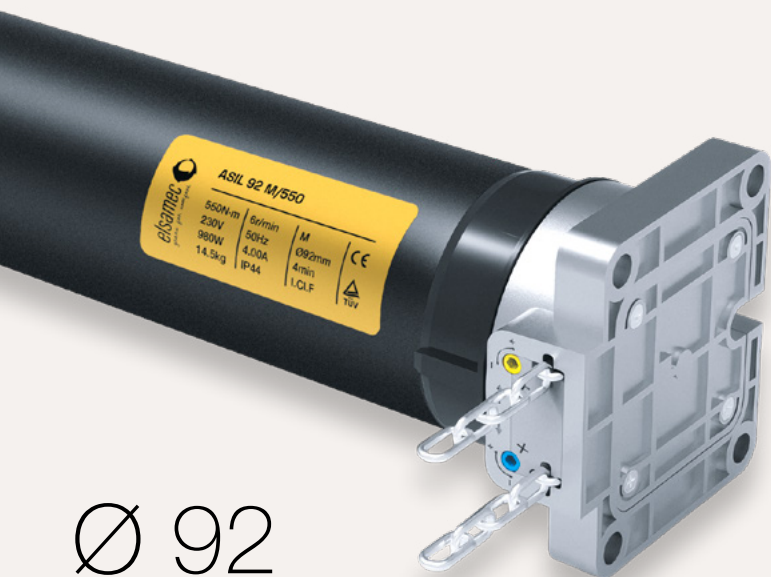

Ø 92

Tubular Gearmotor ASIL
550Nm 2m cable 6rpm
(230V) 92mm adapter with
override

Elettroiduttore Tubolare
ASIL 550Nm cavo 2m
6rpm (230V) adattatore
92mm con manovra



roller
door







mechanic limit + manual



#madeinitaly

Torque (N·m)	Rotating (rpm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power (W)	Rated Current (A)	Limit Turns (turn)	Protection Index (IP)	Running Time (min)	Net Weight (kg)
550	6	230	50	890	4.00	20	IP44	≥ 4	14.5

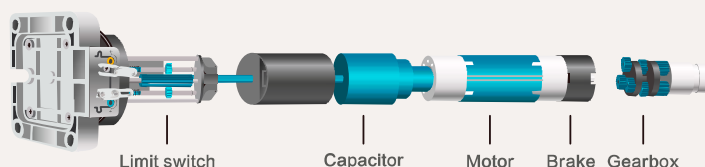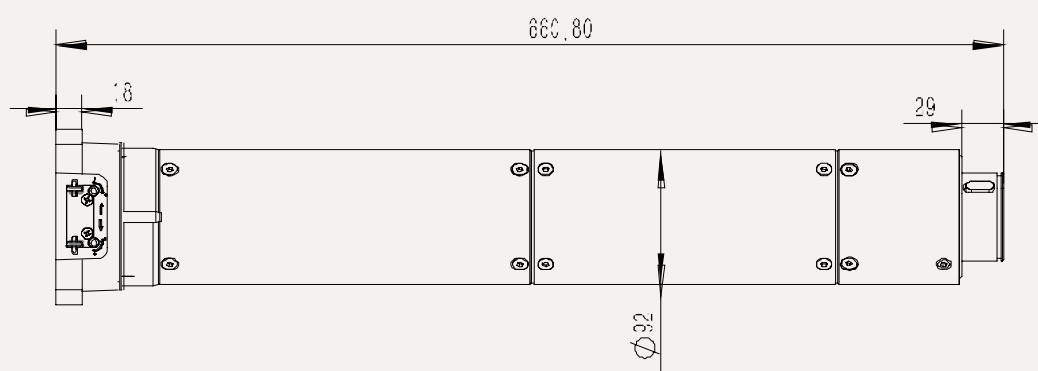

accessories



PILOT_A1
TRANSMITTER NEO QUA
Frequency: 434 MHz
Power: $\leq 10\text{mW}$
Encode: Rolling code
Power Supply: 3Vdc



PILOT_A2
TRANSMITTER
Frequency: 433.92MHz
Power: $\leq 10\text{mW}$
Encode: Auto Matching Code
Power Supply: 3Vdc



PILOT_B1
TRANSMITTER
Frequency: 433.92MHz
Power: $\leq 10\text{mW}$
Encode: Rolling code
Power Supply: 3Vdc



PILOT_B2
TRANSMITTER
Frequency: 433.92MHz
Power: $\leq 10\text{mW}$
Encode: Rolling code
Power Supply: 3Vdc



PILOT_B3
TRANSMITTER
Frequency: 433.92MHz
Power: $\leq 10\text{mW}$
Encode: Rolling code
Power Supply: 3Vdc



DUO_A1
BUTTON SWITCH

Note / Notes



Note / Notes







Elsamec s.r.l.
via Pompeiana, 272
63900 Fermo – Italy

tel. +39 0734 228835
elsamec.it - info@elsamec.it

